1 of 6
jlc

EXHIBIT Q

THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY
A.A.C. R9-14-404(A)

ARIZONA DEPARTMENT OF HEALTH SERVICES

STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 5000* TSH

AGENCY Tucson Police QA SPECIALIST Jennifer Coombs 46160
(Print Name)

INTOXILYZER SERIAL # 66-004814 LOCATION ODD
DATE September 29 ~~15~~ jlc 2004 TIME 0905

✓ Display reads "READY TO START" or "PUSH BUTTON TO START TEST."

DIAGNOSTIC TESTS

✓ DVM Test check. Setting should be between .200 and .600. Mode selection switch S2 on, S1 and S3 off or keyboard menu selection "H". Reading is .366.

✓ Display Test check. Mode selection switch S1 on and S2 and S3 off or keyboard menu selection "V".

✓ Printer Test check. Mode selection switch S1, S2, S3 off or keyboard menu selection "P".

✓ Clock time check. Mode selection switch S10 on or keyboard menu selection "E".

✓ Date check. Mode selection switch S11 on or keyboard menu selection "E".

OPERATIONAL TESTS

✓ Alcohol free subject Test result 0.000 AC

✓ Error recognition logic system functioning
Invalid test printed

✓ Proper sample recognition system
Invalid sample printed ✓
Deficient sample printed ✓

N/A Completeness of sample purge with collection tube**

✓ Calibration standard 0.080 AC
Results: 0.081 AC & 0.080 AC

Instrument operating properly and accurately. YES ✓ NO__

COMMENTS:

SIGNATURE Jennifer L. Coombs

0.N/A alcohol concentration standard collected for subsequent analysis.**

*WITH OR WITHOUT VAPOR RECIRCULATION AND WITH OR WITHOUT KEYBOARD
**THIS STEP IS ONLY REQUIRED IF THIS DEVICE IS BEING USED FOR SAMPLE CAPTURE.

DHS/DSLS/Form C117(Rev.7-93)

SN 66-004814 09/29/04
E767.14 09:15

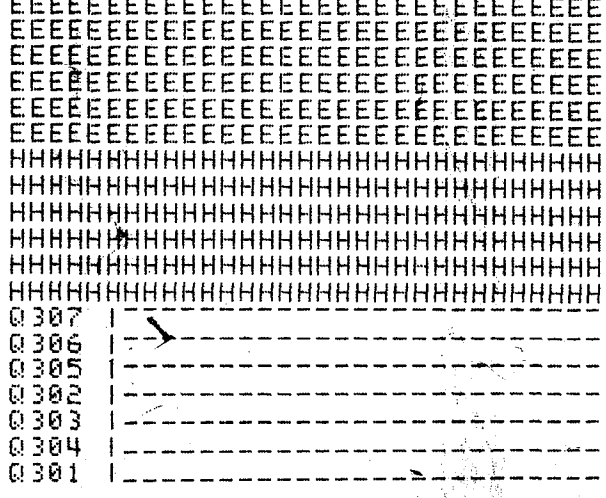

SUBJECT'S NAME

ODD
INSTRUMENT LOCATION

TIME FIRST OBSERVED

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

TUCSON POLICE DEPARTMENT
INTOXILYZER - ALCOHOL ANALYZER
AZ MODEL 5000 SN 66-004814
09/29/04 09:22

TEST	BRAC VALUE	TIME
AIR BLANK	.000	09:21
SUBJECT TEST	.000	09:21
AIR BLANK	.000	09:22

DVM=.366

SUBJECT'S NAME

ODD
INSTRUMENT LOCATION

TIME FIRST OBSERVED

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

296

TUCSON POLICE DEPARTMENT
INTOXILYZER - ALCOHOL ANALYZER
AZ MODEL 5000 SN 66-004814
09/29/04 09:18

TEST	BRAC VALUE	TIME
AIR BLANK	.000	09:17
CAL. CHECK	.081	09:17
AIR BLANK	.000	09:18

SUBJECT'S NAME

TIME FIRST OBSERVED

ODD
INSTRUMENT LOCATION

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

TUCSON POLICE DEPARTMENT
INTOXILYZER - ALCOHOL ANALYZER
AZ MODEL 5000 SN 66-004814
09/29/04 09:19

TEST	BRAC VALUE	TIME
AIR BLANK	.000	09:19
CAL. CHECK	.080	09:19
AIR BLANK	.000	09:19

SUBJECT'S NAME

TIME FIRST OBSERVED

ODD
INSTRUMENT LOCATION

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

Tucson Police Department Crime Laboratory

396

4 of 6
file

SN 66-004814
E767.14
INVALID TEST

09/29/04
09:23

SAMPLE INTRODUCED
AT IMPROPER TIME.

SUBJECT'S NAME

ODD
INSTRUMENT LOCATION

TIME FIRST OBSERVED

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

5 of 6
jlc

EXHIBIT P

THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY
A.A.C. R9-14-404(A)

ARIZONA DEPARTMENT OF HEALTH SERVICES

STANDARD QUALITY ASSURANCE PROCEDURES
INTOXILYZER MODEL 5000*

STANDARD CALIBRATION CHECK PROCEDURE TM

Agency Tucson Police Department Date 9/29/04 Time 0905
Intoxilyzer Serial# 166-004814 Location ODD
QA Specialist Jennifer Coombs 461160
(Print Name)

(✓) 1. Pour a standard alcohol solution of known value into a clean dry simulator jar and assemble the simulator. Insure that a tight seal has been made.
Standard value: 0.080 AC

(✓) 2. Turn on the simulator and allow the temperature to reach 34°C±.2°C.

(✓) 3. Set Intoxilyzer mode selection in the ACA mode by switching mode selection switch #9 on or selecting "C" on keyboard menu.

(✓) 4. Attach simulator to the simulator entrance port on the Intoxilyzer.

✓(✓) 5. Intoxilyzer 5000 display reads "READY TO START" or "PUSH BUTTON".

✓(✓) 6. Push Start Test button or press enter on keyboard.

✓(✓) 7. Insert card in response to display.

✓(✓) 8. Air blank completed.

✓(✓) 9. Calibration check completed.
Test results 0.081 AC ≠ 0.080 AC

✓(✓) 10. Air blank completed.

✓(✓) 11. When display reads Test Complete remove evidence card. Attach the card to the completed checklist.

(✓) 12. Return mode selection switch #9 to off position after all calibration checks are complete or type Q and enter on keyboard.

SIGNATURE Jennifer L. Coombs

*WITH OR WITHOUT VAPOR RECIRCULATION AND WITH OR WITHOUT KEYBOARD

DHS/DSLS/Form C116 (Rev.7-93)

TUCSON POLICE DEPARTMENT
INTOXILYZER - ALCOHOL ANALYZER
AZ MODEL 5000 SN 66-004814
09/29/04 09:24

TEST	BRAC VALUE	TIME
AIR BLANK	.000	09:23
INVALID SAMPLE	.MOA	09:24
AIR BLANK	.000	09:24

BEGIN NEW DEPRIVATION PERIOD

SUBJECT'S NAME

TIME FIRST OBSERVED

ODD
INSTRUMENT LOCATION

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

Sweet Breath

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

TUCSON POLICE DEPARTMENT
INTOXILYZER - ALCOHOL ANALYZER
AZ MODEL 5000 SN 66-004814
09/29/04 09:28

TEST	BRAC VALUE	TIME
AIR BLANK	.000	09:25
*SUBJECT TEST	.060	09:28
AIR BLANK	.000	09:28

* DEFICIENT SAMPLE - VALUE PRINTED WAS HIGHEST OBTAINED.

SUBJECT'S NAME

TIME FIRST OBSERVED

ODD
INSTRUMENT LOCATION

46160
OPERATOR

ADDITIONAL INFORMATION AND/OR REMARKS

INTOXILYZER® INSTRUMENT PRINTER CARD

CMI INC

© 1986 by CMI INC.

6 of 6