


Title: Track Access Request
SOP #: 101.13
Date Issued: 11/19/2013
Supersedes: August 12, 2013
Page: 1 of 10

Classifications: Supervisors, System Mechanics
Other Departments:
Issued By:

 Operations Manager	11/19/13 Date	 Safety & Security Officer	11-19-13 Date
 General Manager	11-19-13 Date		

**I. PURPOSE**

The purpose of this procedure is to maintain a safe environment and efficient transit system for customers, employees, and contractors when work is being performed on the Sun Link Streetcar (SLS) Operational Right-of-Way (ROW). The City of Tucson (COT) has been authorized to construct and operate a fixed rail guide way system on COT, Arizona Department of Transportation (ADOT), and University of Arizona (UofA) property. The SLS Operational ROW is the area including all tracks (single and double) and the space extending four (4) feet beyond the furthest rail, and ten (10) feet from the Overhead Catenary System (OCS). The SLS Operational ROW also includes the substations and the poles and wires that make up the OCS.

In order to maintain a safe environment for anyone requiring track access, the following procedures and requirements must be adhered to by the contractor or city department requesting access to the SLS Operational ROW and/or has the potential to impact the operation of Sun Link.

Rail Supervisory Personnel, Operators, Way Power & Signals employees, Contractors, and Contractors' personnel working in or on the SLS Operational ROW shall have a valid Track Access Training Card (TATC) in their possession. It is essential that contractors are trained to know and understand this procedure. Contractor(s)/employees working on the ROW shall possess a TATC or designate a qualified individual with a TATC within each work group who will be responsible for the safety of the work group.

Title:	Track Access Request
SOP #:	101.13
Date Issued:	11/19/2013
Supersedes:	August 12, 2013
Page:	2 of 10

For the purpose of this document the following terms apply: City of Tucson is referred to as "COT". Other parties or contractors are referred to as "Contractor." The designated contact person for Sun Link is the Rail Supervisor.

## II. EXHIBITS

EXHIBIT A: Sun Link Track Access Request (2 pages)

EXHIBIT B: Sun Link Alignment Map (1 page)

## III. CONTRACTOR RESPONSIBILITIES

1. Prior to any work within the SLS Operational ROW, the Contractor must call the Rail Supervisor at least 7 days prior to scheduling work/access at (520) 791-3333 (5:00 a.m. to 5:00 p.m., Monday-Friday) to discuss the scope of the work proposed within the SLS Operational ROW. These requirements include: location and duration of work, impact on streetcar service, real estate issues, insurance requirements, existing contracts, Blue Stake requirements, and required contractual agreements.
2. A copy of this procedure, including Track Access Request, can be obtained from the SLS Operations and Maintenance Facility or by facsimile, electronically, or U.S. Postal Service (USPS).

Sun Link Operations  
290 E. 8<sup>th</sup> Street  
Tucson, AZ 85705

E- Mail: [trackaccess@tucsonaz.gov](mailto:trackaccess@tucsonaz.gov)  
Phone: (520) 791-3333  
Fax: (520) 882-3797

3. It is the responsibility of the Contractor requesting to work on, under, across, or over the SLS Operational ROW, as defined within this document, to coordinate with SLS personnel.
4. Prior to being granted authority to work within the SLS Operational ROW, the Contractor is required to:
  - a. Provide a completed "Sun Link Track Access Request" (Exhibit A) and a work plan, including drawings as necessary, illustrating proposed work locations and work details. Work plan and drawings will describe the proposed work, equipment, crew size, vehicles to be used, and location of work. The Contractor may be required to meet with the Rail Supervisor or designee in the field to clarify the work plan and determine any additional requirements.

Title: Track Access Request

SOP #: 101.13

Date Issued: 11/19/2013

Supersedes: August 12, 2013

Page: 3 of 10

- b. Comply with applicable federal, state, local, and agency requirements.
  - c. Submit one (1) copy of the work plan to the Rail Supervisor no later than seven (7) calendar days prior to the requested work date. Seven (7) days are required by SLS to develop an alternate operational plan for the system to include coordination with Sun Tran for possible bus bridges, rescheduling staff, establishing temporary stops, and notification to the public.
5. When all items in Item 4 have been submitted, reviewed, and approved, the Contractor will receive an approved Sun Link Track Access Permit which must be in the Contractor's possession prior to commencing work. This document must be retained on site for the duration of the work.
  6. A Track Access Permit from SLS does not replace the need to acquire a Temporary Traffic Control permit issued by COT Traffic Engineering. The Contractor must contact Traffic Engineering for a Temporary Traffic Control Permit for work that impacts traffic, as required by COT.
  7. If required by SLS Operations, the Contractor is responsible for providing temporary traffic control; SLS does not provide temporary traffic control. However, SLS will provide track access training at no charge to Contractors with a required two (2) weeks advance notice. Training is subject to the availability of SLS Operations personnel. Requirements for flaggers shall be based on the impact the proposed work has on service quality and schedules. The Contractor is responsible for satisfying all safety requirements including, but not limited to: field supervision, communication device(s), certifications, reflective safety vests, hard hats, safety glasses, security, etc.
  8. The Contractor will be responsible to reimburse SLS for all labor, equipment, vehicles, materials, power downs, and overhead expenses incurred as a result of supporting its work. Typical expenses include, but are not limited to, engineering, administrative support, field meetings/reviews, and other assistance provided or required by SLS.
  9. Contractor will stop work in progress and immediately notify SLS if work in progress deviates in any way from the written plans submitted and approved by SLS.

Title: Track Access Request

SOP #: 101.13

Date Issued: 11/19/2013

Supersedes: August 12, 2013

Page: 4 of 10

10. The Contractor's work may be stopped immediately by SLS management, with or without notice, at any time. Typical conditions under which this could occur include, but are not limited to:
  - a. Safety violation or issues.
  - b. Scheduling violation or issues.
  - c. Deviations from approved Track Access Permit.
  - d. Temporary traffic control not available.
  - e. Any time SLS management deems necessary.
11. Work performed by Contractor during operational hours shall not cause interference with the constant, continuous, and uninterrupted use of the Streetcar system, or with other contractors performing work along the SLS Operational ROW.
12. Under no circumstances will a contractor access tracks with vehicles, equipment, or machinery without permission of the Rail Supervisor.
13. Excavations within five (5) feet of either side of buried signals or power and communication cables will require SLS personnel present at the site.
14. Cables crossing the track(s) must comply with both National Electric Safety Code (NESC) clearances and pertinent SLS requirements.
15. Contractor will not foul tracks without prior authorization. "Fouling" is defined as workers, equipment, or materials within the defined SLS Operational ROW. Flagger(s) are required when tracks are fouled.
16. In the event that the Contractor is authorized by SLS to perform work on the SLS Operational ROW that moves, disturbs, or modifies SLS's property in any manner, the Contractor shall, at its own expense, restore the property to the same condition before the work was performed. Such restoration must be to the satisfaction of the SLS Operations Manager or designee.
17. The Contractor must comply with all applicable federal, state, and local laws, regulations, and standards affecting its work.
18. As a limitation to any rights or licenses that may be granted to the Contractor, SLS reserves the right to use and maintain its entire property.

Title: Track Access Request

SOP #: 101.13

Date Issued: 11/19/2013

Supersedes: August 12, 2013

Page: 5 of 10

This includes SLS's right to construct, maintain, repair, renew, use, operate, change, or modify: platforms, signal, communication, fiber optics, power, or other wire lines, pipelines, and other facilities upon, along, or across any or all parts of its property. All or any of the above mentioned use and maintenance may be freely done at any time or times by SLS without liability to the Contractor or any other party for compensation or damages.

19. In accordance with SLS's "Track Access Request" requirements and in exchange for the authorization to perform work on or near the SLS Operational ROW, contractor agrees, to the fullest extent permitted by applicable law, to indemnify, defend and hold harmless SLS and its officers, officials, agents, and employees from and against any and all claims, suits, actions, judgments, fines, penalties, loss, damage, costs, or expense (including but not limited to attorneys' fees), whether direct or indirect, due to bodily or personal injury, death, sickness or property damage (including loss of thereof) arising out Contractor's activities.

In the event a third party makes a claim or files a lawsuit against SLS for injury or death to persons, for damage to property, or for costs associated with loss of business, caused in any way by the contractor's activities, the contractor shall defend such claims or suits, on behalf of SLS at contractor's sole cost and expense.

Contractor further agrees to repair any damage or disturbance to SLS property caused by the contractor's activities or caused, in whole or in part, by its subcontractors, employees or agents.

#### **IV. SUN LINK FACTS AND WARNINGS THAT CONTRACTORS MUST KNOW**

1. The Rail Supervisor has authority over all activity dealing with streetcar movement along the SLS Operational ROW.
2. The COT and the Rail Supervisor must authorize any construction activity that fouls the SLS Operational ROW.
3. Sun Link streetcars are quiet and travel at speeds up to twenty-five (25) mph.
4. Always STOP and LOOK in both directions and LISTEN before crossing tracks.

<p>Title: Track Access Request</p> <p>SOP #: 101.13</p> <p>Date Issued: 11/19/2013</p> <p>Supersedes: August 12, 2013</p> <p>Page: 6 of 10</p>
--

5. Constantly be on the lookout for streetcar movements when occupying the SLS Operational ROW, even when flagger(s) are present.
6. Electrified high voltage cables are located above the tracks.
7. The overhead contact wire is **NOT electrically insulated**.
8. Non-insulated overhead contact wire carries **a minimum of 750 VOLTS DC**.
9. Electrified high voltage cables are buried throughout the SLS Operational ROW.
10. Always keep clear of switch machines. Switches operate automatically and will crush feet, hands, and other body parts if between the rail and the moveable switch point.
11. Buried cables may or may not be encased in conduit or concrete.
12. Buried cables may carry a variety of lethal voltages: 34.4KVA, 15KVA, 240VAC, 120VAC, 108VAC and 750VDC.
13. Buried cable is located at varying depths and distances from the tracks.
14. Buried cable is located under tracks and behind or around station stop platforms and electrical houses (substations, relay houses, communications rooms, etc.).
15. Sun Link streetcars require hundreds of feet of stopping distance.
16. Sun Link streetcars are scheduled to operate with a maximum of 10 minutes separation. They may be as close as a few seconds apart (streetcars moving in opposite direction on the other track).
17. Sun Link streetcars can operate on any track in any direction at any time.
18. Peak ridership periods are between 6:30 a.m. and 6:30 p.m. weekdays.
19. Sun Link streetcars typically do not operate from 12:00 a.m. to 5:00 a.m. weekdays.
20. Track 1 is the normal eastbound track. Track 2 is the normal westbound track.

Title: Track Access Request

SOP #: 101.13

Date Issued: 11/19/2013

Supersedes: August 12, 2013

Page: 7 of 10

21. Normal streetcar direction is east on the eastbound track and west on the westbound track.
22. Sun Link streetcars are normally scheduled to stop at all station stops.
23. Contractor/work crew personnel must wear OSHA required personal protective equipment.
24. Work performed at night shall have appropriate lighting to provide good visibility.

EXHIBIT A



TRACK ACCESS REQUEST

Sun Link – OPERATIONS

Phone: (520) 791-3333 Fax: (520) 882-3797 Email: trackaccess@tucsonaz.gov

COMPANY: \_\_\_\_\_ DATE: \_\_\_\_\_

ON-SITE REPRESENTATIVE/CONTACT: \_\_\_\_\_

TITLE: \_\_\_\_\_

TELEPHONE: \_\_\_\_\_ FAX: \_\_\_\_\_

CELLULAR/PAGER NO.: \_\_\_\_\_

**Location and Description of work to be performed on Sun Link Right-of-Way:**

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**IMPORTANT: You must notify Operations Control Center 30 MINUTES PRIOR TO ENTERING AND EXITING THE RIGHT OF WAY at (520) 791-3333.**

**Equipment to be used:** \_\_\_\_\_

Work Date and Time Requested: \_\_\_\_\_ Start Date: \_\_\_\_\_

Start Time: \_\_\_\_\_

Finish Time: \_\_\_\_\_

**Special Operation Conditions:**

1. Requests must be submitted no later than 7 calendar days prior to the start date.
2. Approved and signed requests are valid for a maximum of 7 calendar days.
3. All personnel are required to wear OSHA required personal protective equipment while on or near the Sun Link Operational Right-of-Way.
4. Sun Link Rail Supervisor must be notified, authorize the permit, and assign a work number prior to occupying the alignment and/or starting any work.

**CAUTION: The Overhead Catenary System (OCS) must be considered ENERGIZED (HOT) at all times.**

Removal of electrical power must be confirmed in the field with the designated personnel.

EXHIBIT A



TRACK ACCESS REQUEST

Sun Link – OPERATIONS

Phone: (520) 791-3333 Fax: (520) 882-3797 Email: trackaccess@tucsonaz.gov


**THIS SECTION WILL BE COMPLETED BY SUN LINK RAIL SUPERVISOR OR DESIGNEE IN THE FIELD.**

Permit Number: \_\_\_\_\_

- Required: Special Instructions  Yes  No Explain \_\_\_\_\_
- Streetcar Order  Yes  No Explain \_\_\_\_\_
- Wayside Signs  Yes  No Explain \_\_\_\_\_
- Flagger  Yes  No Explain \_\_\_\_\_
- Power Removal  Yes  No Explain \_\_\_\_\_
- Sun Link Employee  Yes  No Explain \_\_\_\_\_

Approved By: \_\_\_\_\_ Track Access Coordinator

Date Issued: \_\_\_\_\_

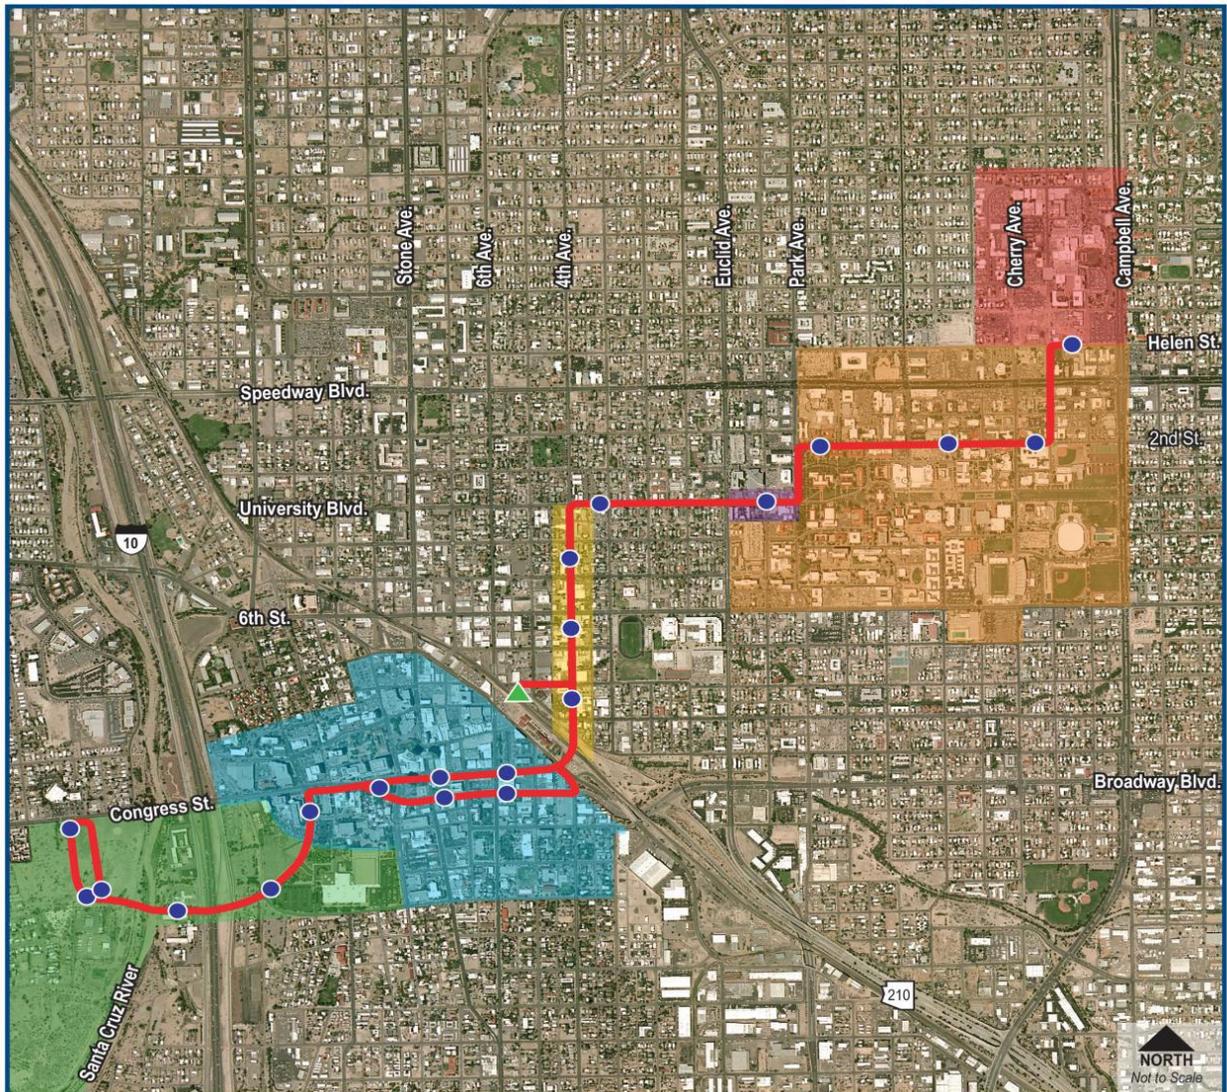

**LEGEND**

- Modern Streetcar
  - Station
  - ▲ Maintenance and Storage Facility
- Downtown Master Plan Area
  - Downtown
  - 4th Avenue Business District
- Main Gate Business District
  - University of Arizona
  - Arizona Health Science Center

02-02-10