


**SEE STANDARD SPECIFICATION 1410, 1411, 1425, SD-300.**

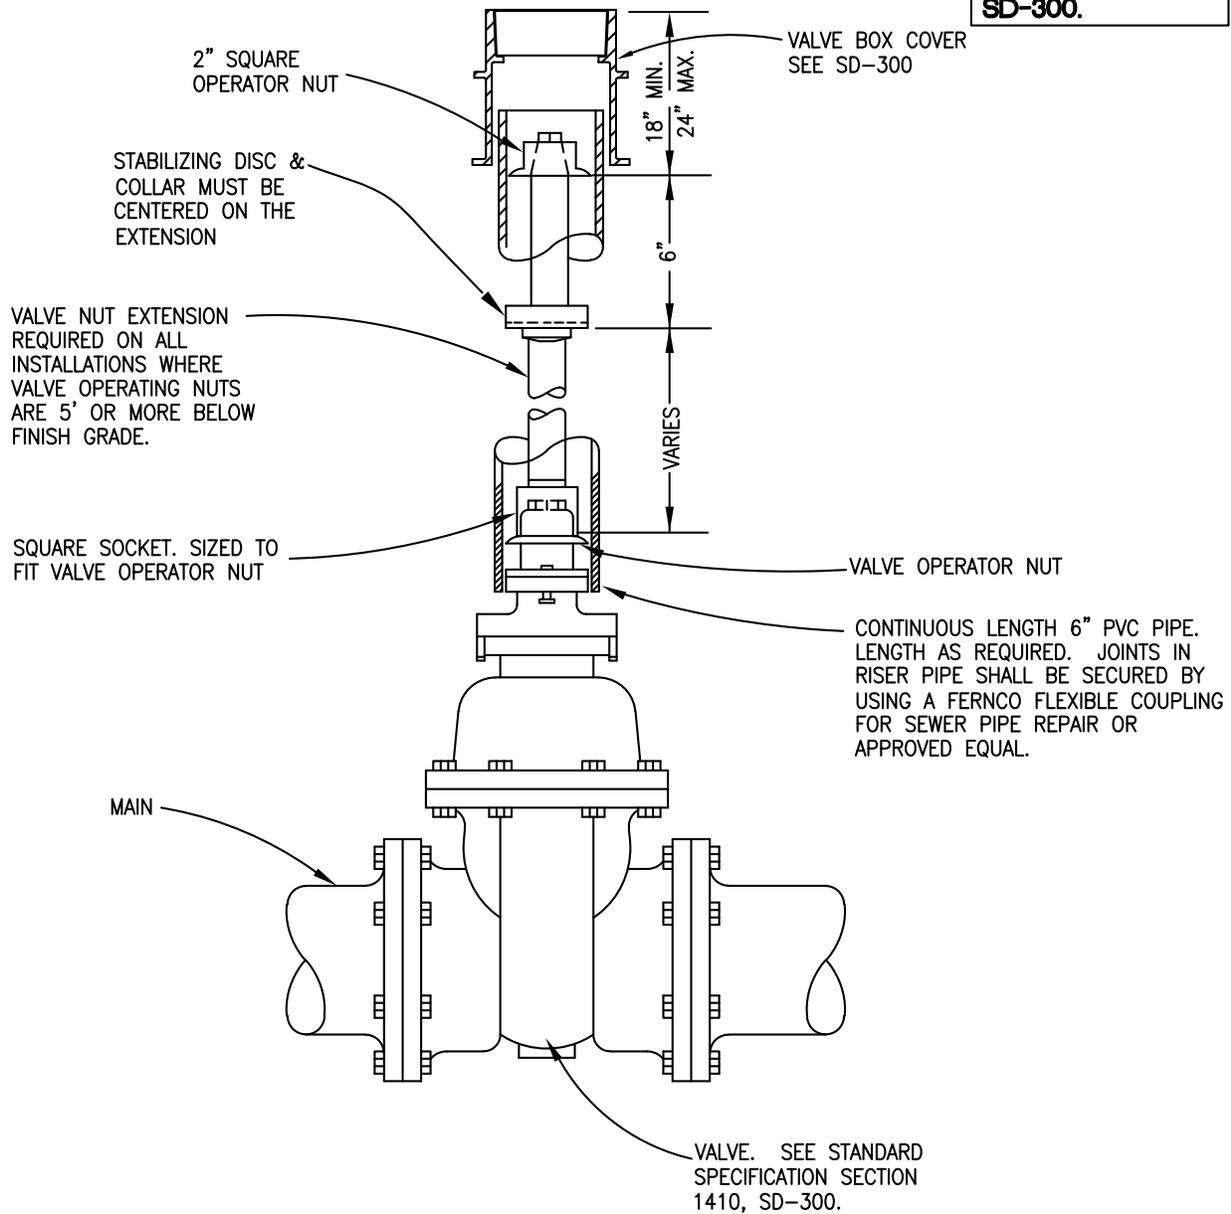


**NOTES:**

1. OPERATOR NUT, VALVE NUT EXTENSION, DISC & COLLAR & SQUARE SOCKET SHALL ALL BE CENTERED VERTICALLY OVER VALVE OPERATOR NUT.
2. VALVE NUT EXTENSIONS TO BE SUPPLIED BY TUCSON WATER. VALVE NUT EXTENSIONS ARE IN 2' INCREMENTS STARTING AT 4'.
3. EXTENSIONS OVER 12 FEET NEED TO HAVE A STABILIZER RING CENTERED ON THE EXTENSION. IT SHOULD BE 1/4" THICK BY 5-1/2" IN DIAMETER.
4. VALVE NUT EXTENSIONS SHALL BE OF CONTINUOUS LENGTH UNLESS APPROVED BY THE ENGINEER.

<b>ISSUED:</b>		<b>STANDARD DETAIL</b>			<b>DETAIL NO.</b>
6/97		<b>VALVE NUT EXTENSION</b>			<b>SD-305</b>
<b>REVISED:</b>					<b>SHEET 1 OF 2</b>
8/17					

REFERENCE STANDARD  
SPECIFICATION 1425

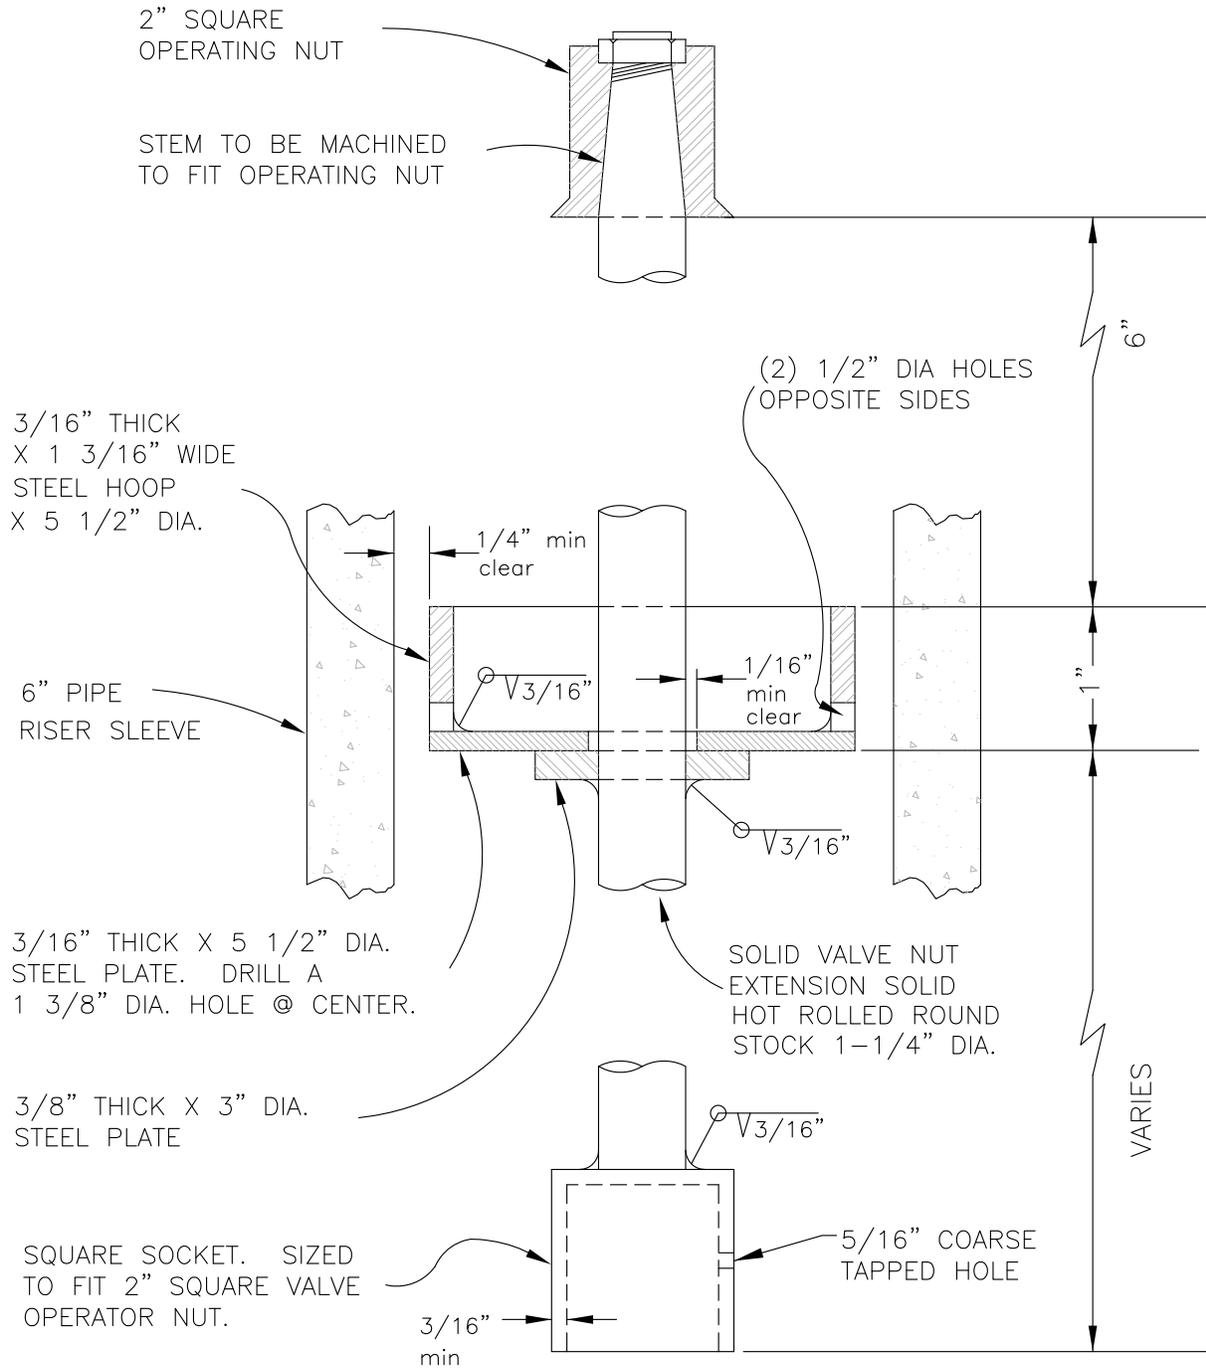

DETAILS

ISSUED:		STANDARD DETAIL		DETAIL NO.
6/97		VALVE NUT EXTENSION		SD-305
REVISED:				SHEET 2 OF 2
9/08				