



SEE STANDARD SPECIFICATION 0204, 0214, 0501

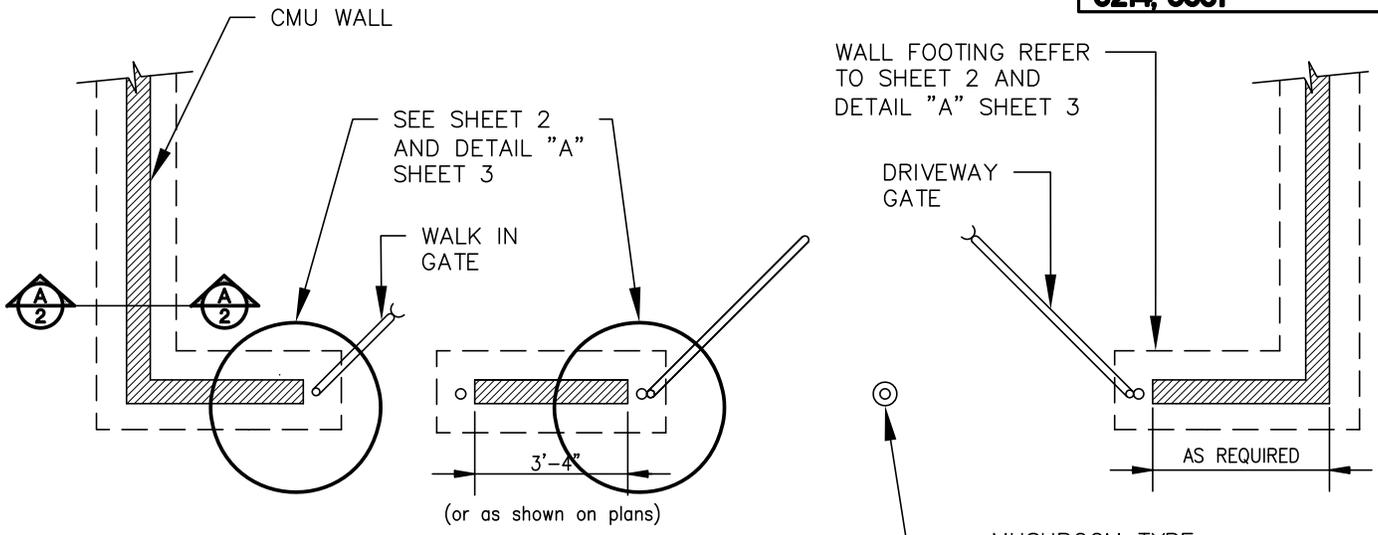

PLAN

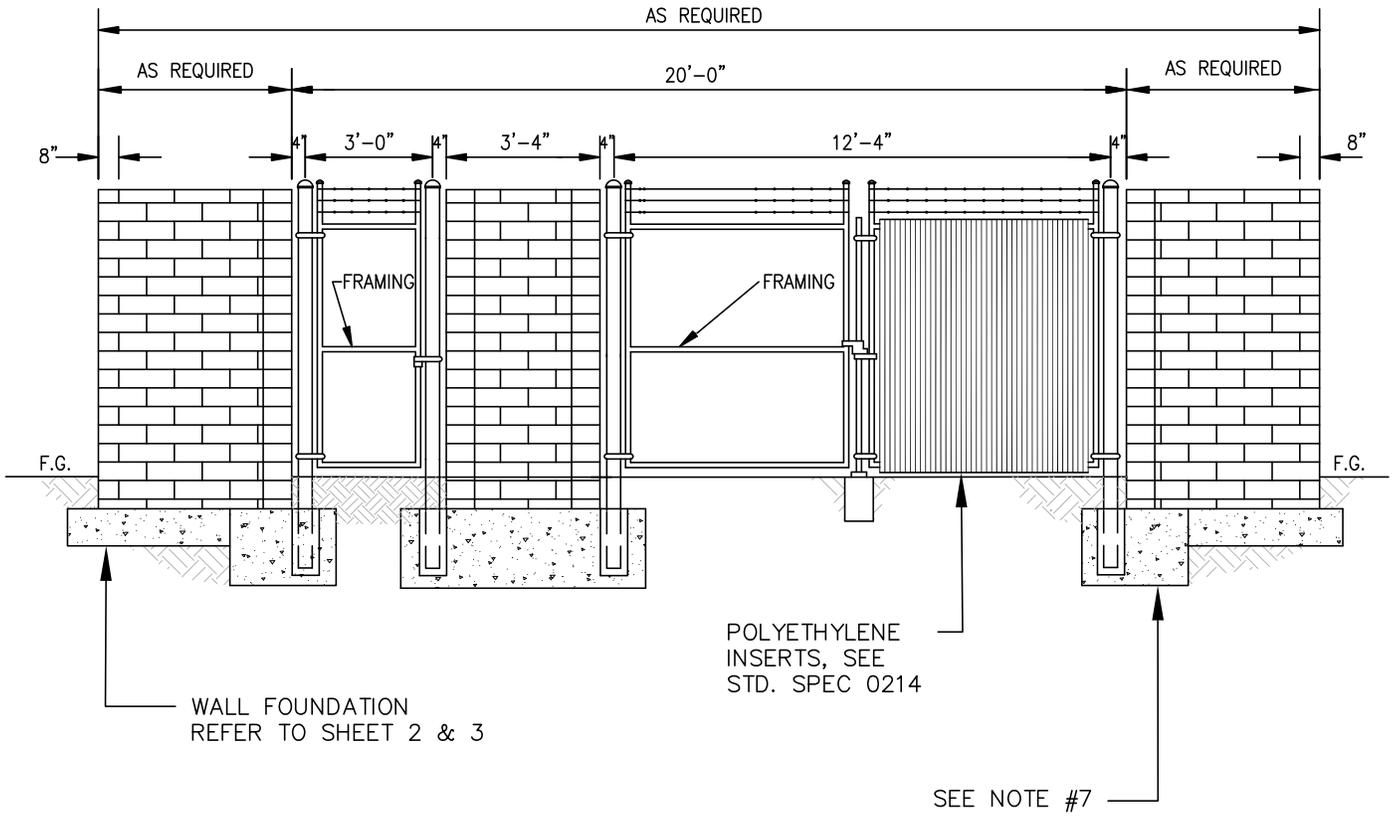


ELEVATION

ISSUED:		STANDARD DETAIL		DETAIL NO.		
6/97				BLOCK WALL ENCLOSURE AND GATES		SD-1610
REVISED:						
11/17						SHEET 1 OF 3


NOTES:

1. Gates, fence and post foundations shall be in accordance with Standard Specification 0214.
2. Grout all cells a minimum of 12" above finished grade (F.G.).
3. Grout cells with vertical bars to their full height.
4. Alternate direction of bends in the vertical bars within concrete footing.
5. Actual layout and overall dimensions shall be as shown on plans.
6. CMU wall shall be in accordance with the special provisions.
7. Footing design shall be designed by structural engineer under the most recent IBC code.

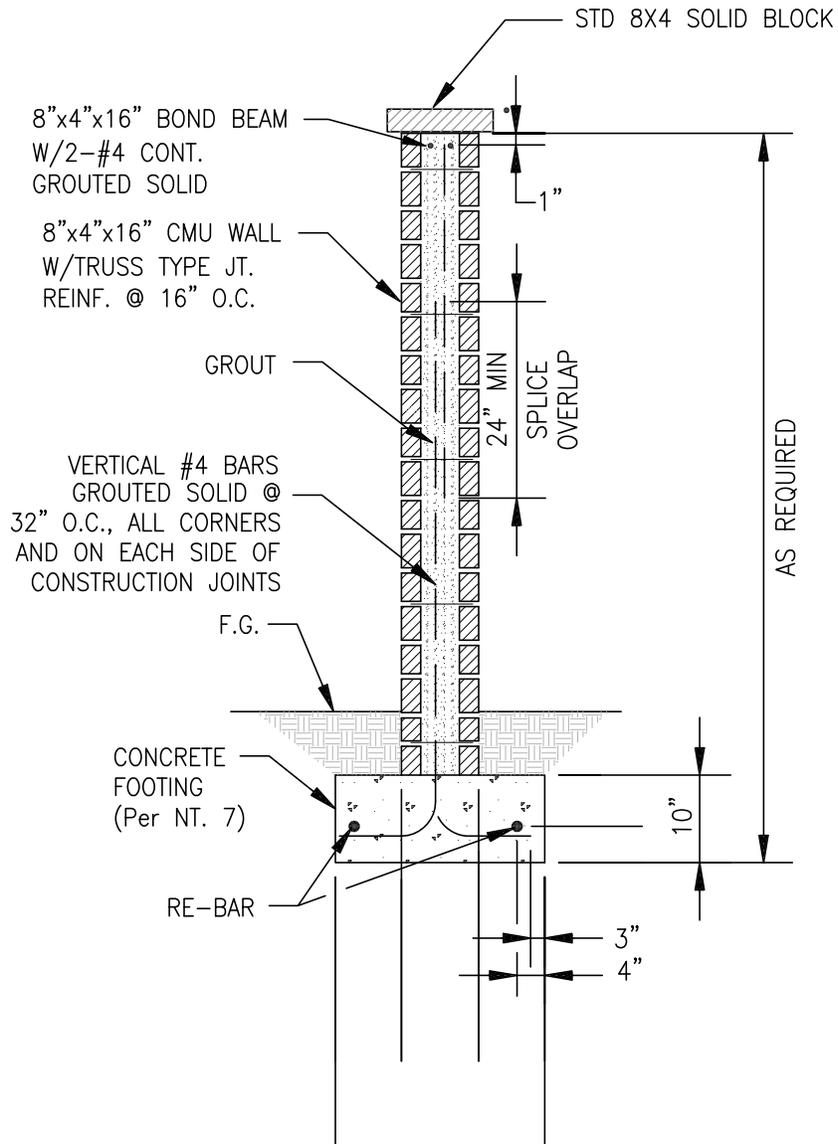


SECTION A-A

ISSUED:		STANDARD DETAIL		DETAIL NO.
6/97		BLOCK WALL		SD-1610
REVISED:		ENCLOSURE AND GATES		SHEET 2 OF 3
9/17				

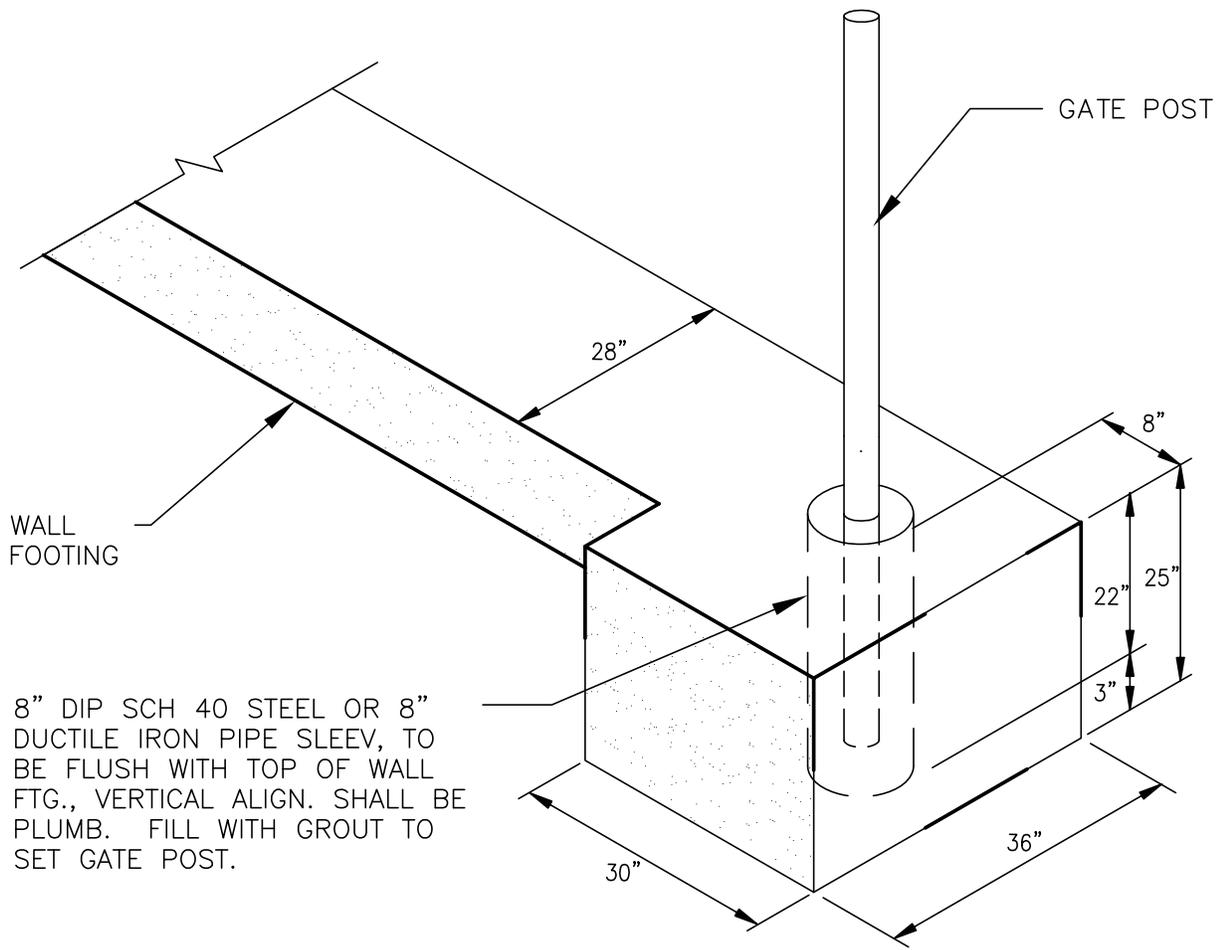

DETAIL A- ISOMETRIC

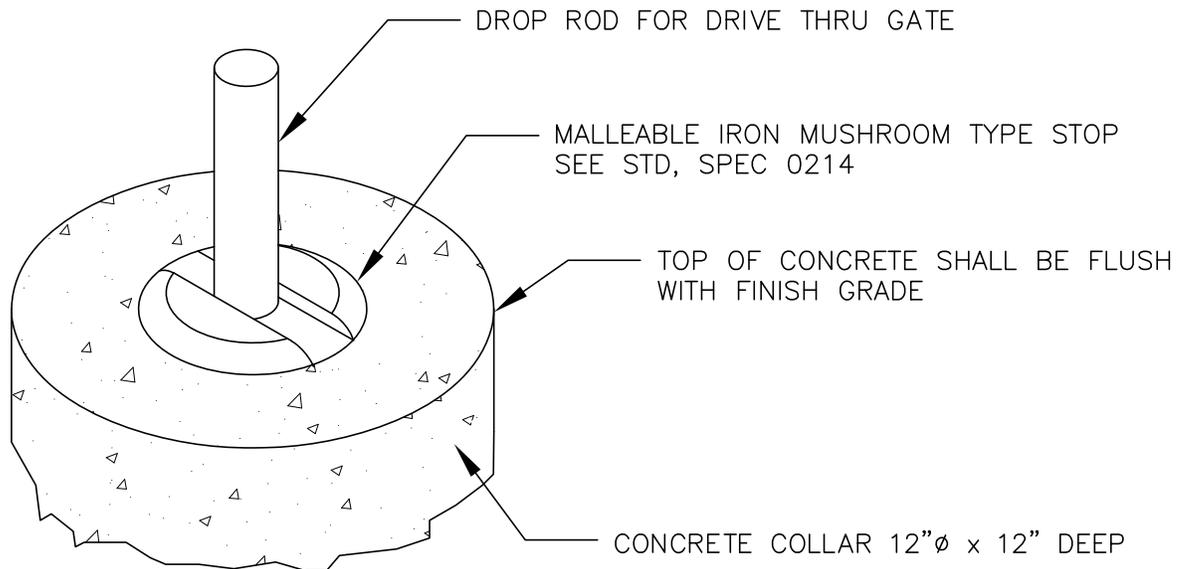

DETAIL B-MUSHROOM STOP

ISSUED:		STANDARD DETAIL		DETAIL NO.
6/97		BLOCK WALL ENCLOSURE AND GATES		SD-1610
REVISED:				SHEET 3 OF 3
9/17				